
vicolux® Spot Light - SPOT50-R633/C

Short description: focusable spot light, red, If diameter: 40-200 mm, WD: 400-2000 mm, controlled

Order number: 1-10-702

EAN: 4251692648001




Characteristics

- LED spot light with direct illumination
 - Integrated focusing optics for adjusting the luminous field and the working distance
 - homogeneous illumination
 - lighting controller integrated in casing
 - continuous or pulsed operation
 - pulse-length and brightness adjustable
 - connection: cable with open ends
-

Technical data

Light colour	Red, 633 nm
Operation voltage	24 VDC (10 - 30 V)
Irradiance ¹	92.8 W/m ²
Illuminance ¹	11.600 lx
Housing material	Aluminium, black anodised
Weight	370 g
Degree of protection	IP50
Safety class	Class III, safety extra low voltage (SELV)
Risk group (DIN EN 62471)	Freie Gruppe
Ambient temperature	0 °C ... 40 °C
¹ at 500 mm working distance	

Drawings

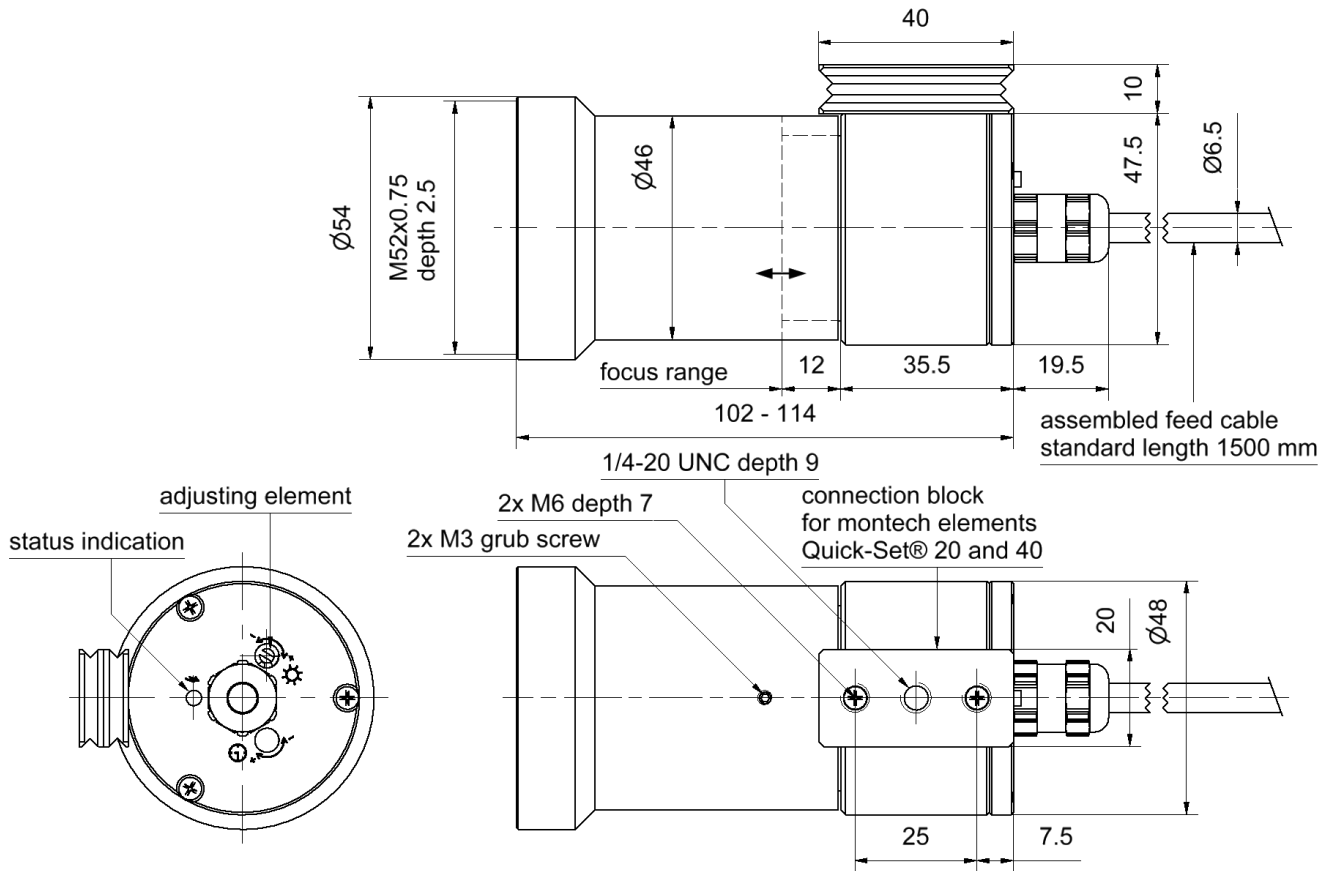

Dimensional drawing in mm

RD	V+		
BU	GND		
GN	+CV		
YE	-CV		
PK	+ON/OFF		
GY	-ON/OFF		

Core colour	Signal	Description
RD (red)	V+	Operating voltage
BU (blue)	GND	Ground
GN (green)	+CV	Control voltage
YE (yellow)	-CV	Control voltage
PK (pink)	+ON/OFF	Switch input
GY (grey)	-ON/OFF	Switch input

Pin assignment: cable open, 6-core