

vicolux® Bar Light - LDLF30x300-IR850/UDC

Short description: bar light, IR850, diffuse, lf-size: 30 mm x 300 mm, flashable by flash controller

Order number: 1-13-880

EAN: 4251692680155

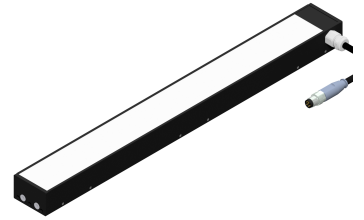

Characteristics

- LED bar light with diffuse illumination
 - homogeneous illumination
 - current controlled LED light, flashable
 - safe operation due to vicolux® smart light Controller (e.g. DLC3005)
 - connection: cable with M8 connector
 - metal casing, optical material: PMMA
 - multiple mounting options
-

Technical data

Light-emitting surface	30 mm x 300 mm
Light colour	Infrared, 850 nm
Light design	Diffuse
Special feature	Flashable with flash controller
Power consumption	10.0 W
Radiance	
• Continuous operation	85 W/(m ² sr)
• Flash mode	990 W/(m ² sr)
Housing material	Aluminium, black anodised
Optical material	PMMA
Weight	330g
Degree of protection	IP 50
Safety class	Class III, safety extra low voltage (SELV)
Risk group (DIN EN 62471)	Exempt
Ambient temperature	0 °C to 45 °C

Notices

The lighting can only be operated in conjunction with a lighting controller or a suitable current source.

vicolux[®] smart light lighting controllers limit the electrical parameters automatically and also monitor the temperature of the device.


Can be combined with

Order number	Title	Description
LED Controller DLC3005		
1-30-202	DLC3005	LED lighting controller, digital, cont./flash current: 4.8A/18A, wall mounting
1-30-209	DLC3005-R	LED lighting controller, digital, cont./flash current: 4.8A/18A, DIN rail mounting


Accessories for Area and Bar lights - LDLF30x300-IR850/UDC

Order number	Title	Description
Connection cable M8-4pin		
1-11-611	Cable-M8-4p-5A-straight-1m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end
1-11-612	Cable-M8-4p-5A-straight-2m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end
1-11-613	Cable-M8-4p-5A-straight-3m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end
1-11-614	Cable-M8-4p-5A-straight-5m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end
1-11-609	Cable-M8-4p-4A-straight-5m	4x0.25mm ² , 4A, 60V, PUR, IP67, M8-4pin straight socket to free cable end
1-11-605	Cable-M8-4p-4A-angled-2m	4x0.25mm ² , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end
1-11-604	Cable-M8-4p-4A-angled-5m	4x0.25mm ² , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end
Extension cable M8-4pin		
1-11-093	Extension cable-M8-4p-5A-0.6m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug
1-11-094	Extension cable-M8-4p-5A-1.5m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug
1-11-095	Extension cable-M8-4p-5A-3.0m	4x0.5mm ² , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug

Drawings

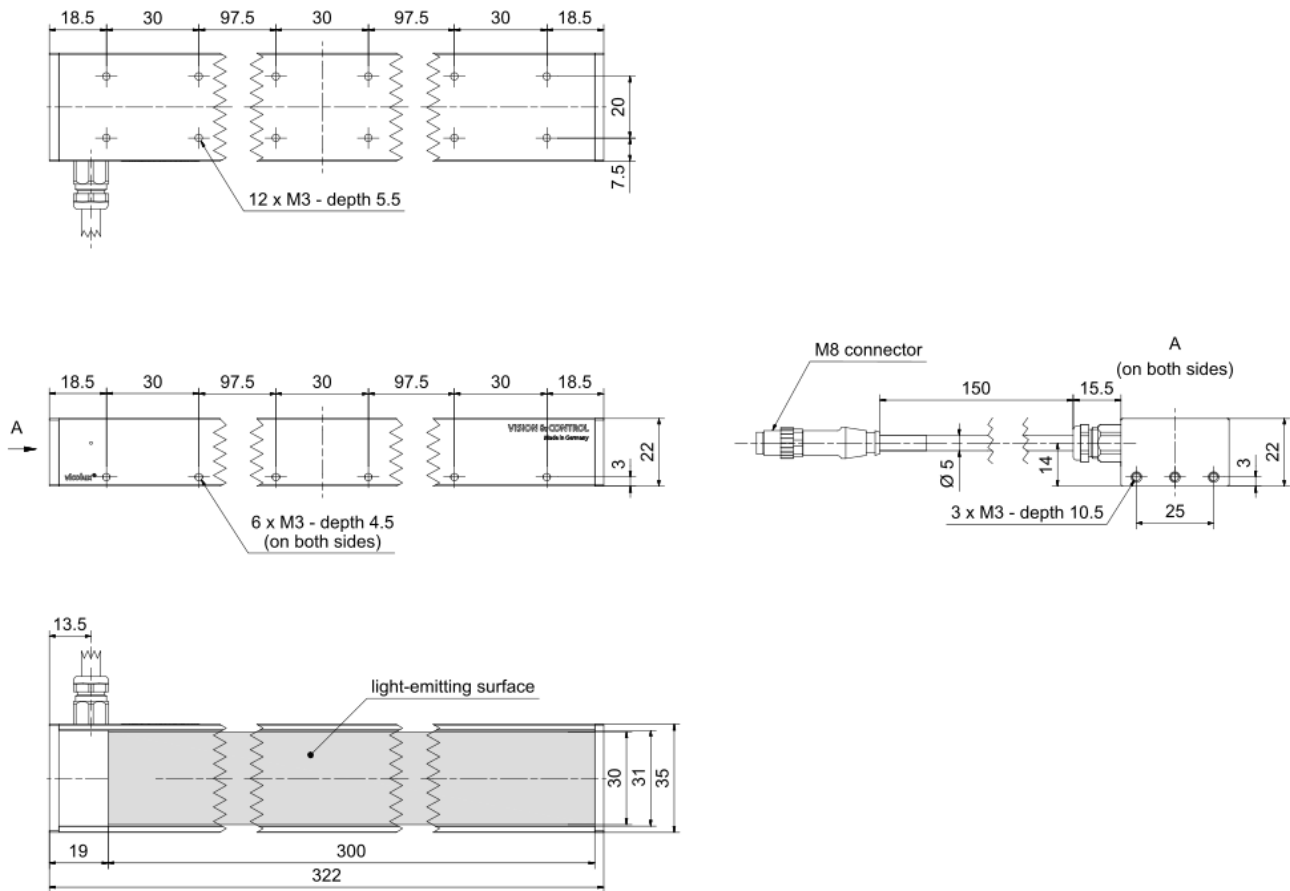

Dimensional drawing in mm

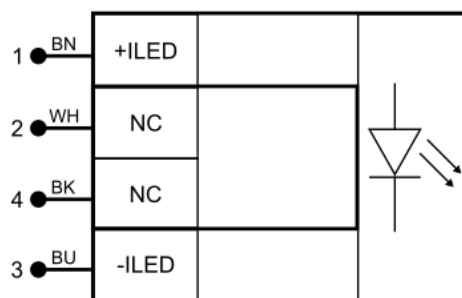

1	+ILED	LED anode
2	NC	Do not use
4	NC	Do not use
3	-ILED	LED cathode

Pin assignment of the M8 connector