

---

## vicolux® Bar Light - LDLF60x120-G525/UDC

---

|                           |                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------|
| <b>Short description:</b> | bar light, green, diffuse, lf-size: 60 mm x 120 mm, flashable by flash controller |
| <b>Order number:</b>      | 1-13-950                                                                          |
| <b>EAN:</b>               | 4251692680810                                                                     |

---



### Characteristics

- LED bar light with diffuse illumination
  - homogeneous illumination
  - current controlled LED light, flashable
  - safe operation due to vicolux® smart light Controller (e.g. DLC3005)
  - connection: cable with M8 connector
  - metal casing, optical material: PMMA
  - multiple mounting options
-

---

## Technical data

|                           |                                            |
|---------------------------|--------------------------------------------|
| Light-emitting surface    | 60 mm x 120 mm                             |
| Light colour              | Green, 525 nm                              |
| Light design              | Diffuse                                    |
| Special feature           | Flashable with flash controller            |
| Power consumption         | 7.0 W                                      |
| Radiance                  |                                            |
| • Continuous operation    | 20 W/(m <sup>2</sup> sr)                   |
| • Flash mode              | 140 W/(m <sup>2</sup> sr)                  |
| Housing material          | Aluminium, black anodised                  |
| Optical material          | PMMA                                       |
| Weight                    | 258 g                                      |
| Degree of protection      | IP 50                                      |
| Safety class              | Class III, safety extra low voltage (SELV) |
| Risk group (DIN EN 62471) | Exempt                                     |
| Ambient temperature       | 0 °C to 45 °C                              |

---

## Notices

The lighting can only be operated in conjunction with a lighting controller or a suitable current source.

vicolux<sup>®</sup> smart light lighting controllers limit the electrical parameters automatically and also monitor the temperature of the device.

---





## Can be combined with

| Order number                  | Title     | Description                                                                        |
|-------------------------------|-----------|------------------------------------------------------------------------------------|
| <b>LED Controller DLC3005</b> |           |                                                                                    |
| 1-30-202                      | DLC3005   | LED lighting controller, digital, cont./flash current: 4.8A/18A, wall mounting     |
| 1-30-209                      | DLC3005-R | LED lighting controller, digital, cont./flash current: 4.8A/18A, DIN rail mounting |


## Accessories for Area and Bar lights - LDLF60x120-G525/UDC

| Order number                    | Title                         | Description                                                                                 |
|---------------------------------|-------------------------------|---------------------------------------------------------------------------------------------|
| <b>Connection cable M8-4pin</b> |                               |                                                                                             |
| 1-11-611                        | Cable-M8-4p-5A-straight-1m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-612                        | Cable-M8-4p-5A-straight-2m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-613                        | Cable-M8-4p-5A-straight-3m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-614                        | Cable-M8-4p-5A-straight-5m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-609                        | Cable-M8-4p-4A-straight-5m    | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin straight socket to free cable end       |
| 1-11-605                        | Cable-M8-4p-4A-angled-2m      | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end         |
| 1-11-604                        | Cable-M8-4p-4A-angled-5m      | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end         |
| <b>Extension cable M8-4pin</b>  |                               |                                                                                             |
| 1-11-093                        | Extension cable-M8-4p-5A-0.6m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |
| 1-11-094                        | Extension cable-M8-4p-5A-1.5m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |
| 1-11-095                        | Extension cable-M8-4p-5A-3.0m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |

## Drawings

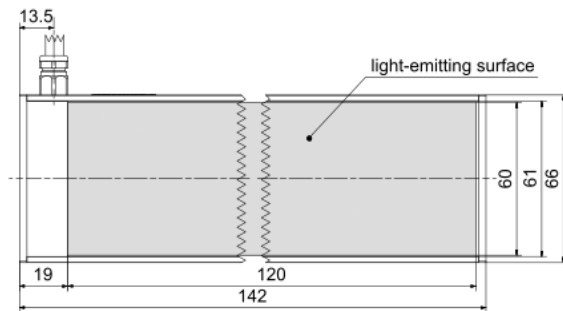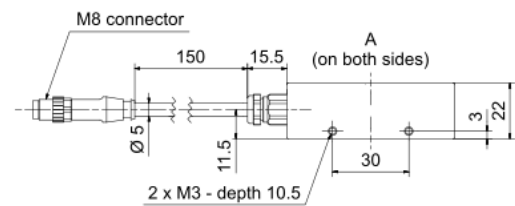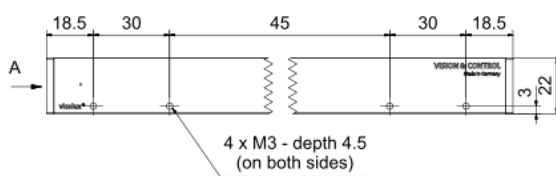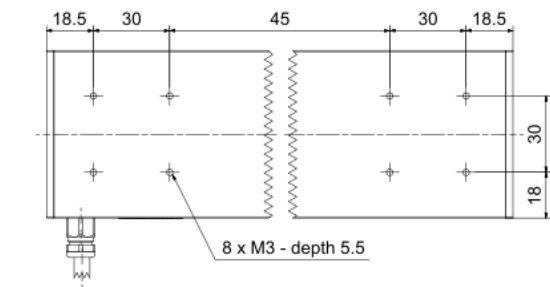

Dimensional drawing in mm



|   |    |       |  |  |
|---|----|-------|--|--|
| 1 | BN | +ILED |  |  |
| 2 | WH | NC    |  |  |
| 4 | BK | NC    |  |  |
| 3 | BU | -ILED |  |  |

|   |       |             |
|---|-------|-------------|
| 1 | +ILED | LED anode   |
| 2 | NC    | Do not use  |
| 4 | NC    | Do not use  |
| 3 | -ILED | LED cathode |

Pin assignment of the M8 connector