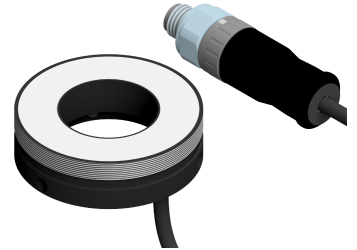

vicolux® Ring Light - RK1220-W5K7/UDC/-a- Diameter of luminous field 24/40 mm

Short description: ring light, white, coaxial, If diameter: 24/40 mm, flashable by flash controller

Order number: 1-33-003

EAN: 4251692644485



Characteristics

- LED ring light with direct illumination for direct mounting on lenses
 - homogeneous illumination
 - operating modes and lighting parameters are freely configurable via lighting controller e.g. vicolux® smart light lighting controller
 - connection: cable with M8 connector
 - robust metal casing, protection class IP67
 - extensive optics and mounting accessories available
-

Technical data

Light-emitting surface	Inner diameter: 24 mm Outer diameter: 40 mm
Light colour	White, 5700 K
Power supply	For current source only!
Special feature	Flashable with flash controller
Continuous operation	
• Power consumption	2.0 W
Flash mode	
• Power consumption	2.0 W
Housing material	Aluminium, black anodised
Optical material	LED, moulded
Weight	40 g
Degree of protection	IP67
Safety class	Class III, safety extra low voltage (SELV)
Risk group (DIN EN 62471)	Risk group 0 (exempt group)
Ambient temperature	0 °C ... +45 °C

Notices

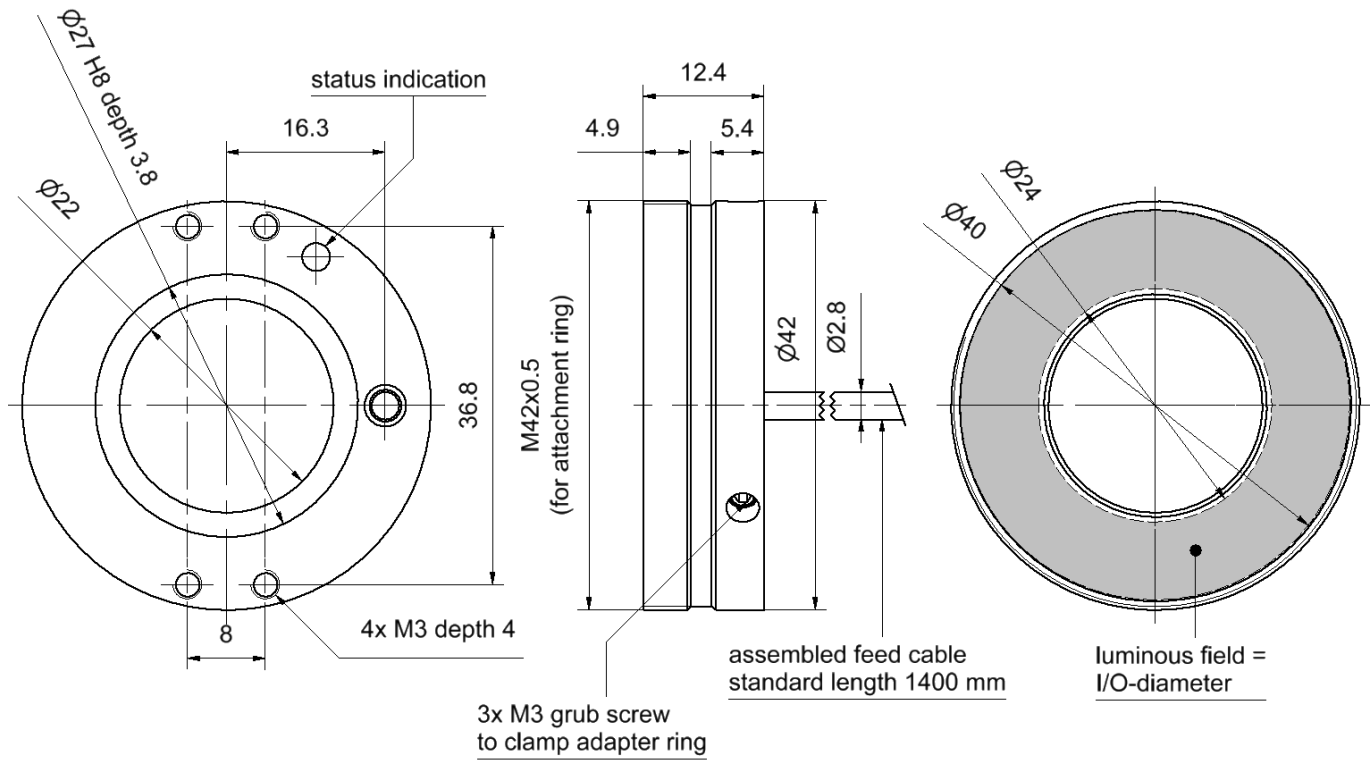
The lighting can only be operated in conjunction with a lighting controller or a suitable current source.

vicolux® smart light lighting controllers limit the electrical parameters automatically and also monitor the temperature of the device.

Can be combined with

Order number	Title	Description
<i>LED Controller DLC3005</i>		
1-30-202	DLC3005	LED lighting controller, digital, cont./flash current: 4.8A/18A, wall mounting
1-30-209	DLC3005-R	LED lighting controller, digital, cont./flash current: 4.8A/18A, DIN rail mounting

Drawings



Dimensional drawing in mm