

---


## vicolux® Spot Light - SLB-500-IR1050-P-24V

---

**Short description:** compact spot light, IR1050, P-LED, variable work distance, basic version, 24V, switchable

**Order number:** 1-33-337

**Actual Notice:** **coming soon**



---

### Characteristics

- efficient LED spot lighting without condensor optics (floodlights)
  - compact, thermally optimized design
  - high light output with wide beam angle, excellently suited e.g. for area illumination
  - high uniformity in light distribution
  - the pronounced mounting surface enables optimum heat dissipation
  - robust, without movable adjustment elements
  - the high light intensity as well as the optical design allow the use also at variable working distance
  - 24V: continuous and pulse operation
  - also available as flashable high-power variant
  - developed for the requirements of industrial image processing
-

---

**Technical data**

|                                      |                                             |
|--------------------------------------|---------------------------------------------|
| Beam angle                           | 110°                                        |
| Luminous field diameter <sup>1</sup> | 570 mm                                      |
| Light colour (typ.)                  | Infrarot, 1050 nm                           |
| Operating mode                       | Continuous operation<br>Switching operation |
| Operation voltage                    | 24 VDC (19 - 29 V)                          |
| Power consumption                    | max. 3.5 W                                  |

**Continuous operation**


|                      |                                      |
|----------------------|--------------------------------------|
| Housing material     | Aluminium, black anodised            |
| Optical material     | Glass                                |
| Filter thread        | M28 x 0.5                            |
| Weight               | 58 g                                 |
| Degree of protection | IP 50                                |
| Safety class         | III, Sicherheitskleinspannung (SELV) |
| Ambient temperature  | -10 °C bis +45 °C                    |

<sup>1</sup> at 200 mm working distance<sup>2</sup> at 11 mrad

## Accessories for Spot lights - SLB-500-IR1050-P-24V

| Order number                    | Title                         | Description                                                                                 |
|---------------------------------|-------------------------------|---------------------------------------------------------------------------------------------|
| <b>Connection cable M8-4pin</b> |                               |                                                                                             |
| 1-11-611                        | Cable-M8-4p-5A-straight-1m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-612                        | Cable-M8-4p-5A-straight-2m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-613                        | Cable-M8-4p-5A-straight-3m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-614                        | Cable-M8-4p-5A-straight-5m    | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to free cable end        |
| 1-11-609                        | Cable-M8-4p-4A-straight-5m    | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin straight socket to free cable end       |
| 1-11-607                        | Cable-M8-4p-4A-straight-10m   | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin straight socket to free cable end       |
| 1-11-605                        | Cable-M8-4p-4A-angled-2m      | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end         |
| 1-11-604                        | Cable-M8-4p-4A-angled-5m      | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end         |
| 1-11-606                        | Cable-M8-4p-4A-angled-10m     | 4x0.25mm <sup>2</sup> , 4A, 60V, PUR, IP67, M8-4pin angled socket to free cable end         |
| <b>Extension cable M8-4pin</b>  |                               |                                                                                             |
| 1-11-093                        | Extension cable-M8-4p-5A-0.6m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |
| 1-11-094                        | Extension cable-M8-4p-5A-1.5m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |
| 1-11-095                        | Extension cable-M8-4p-5A-3.0m | 4x0.5mm <sup>2</sup> , 5A, 30V, PUR, IP67, M8-4pin straight socket to M8-4pin straight plug |
| <b>Power supply</b>             |                               |                                                                                             |
| 4-40-218                        | Power supply 24V-120W-5A      | for DIN rail mounting, without connection cable, type: SDR-120-24                           |

## Drawings

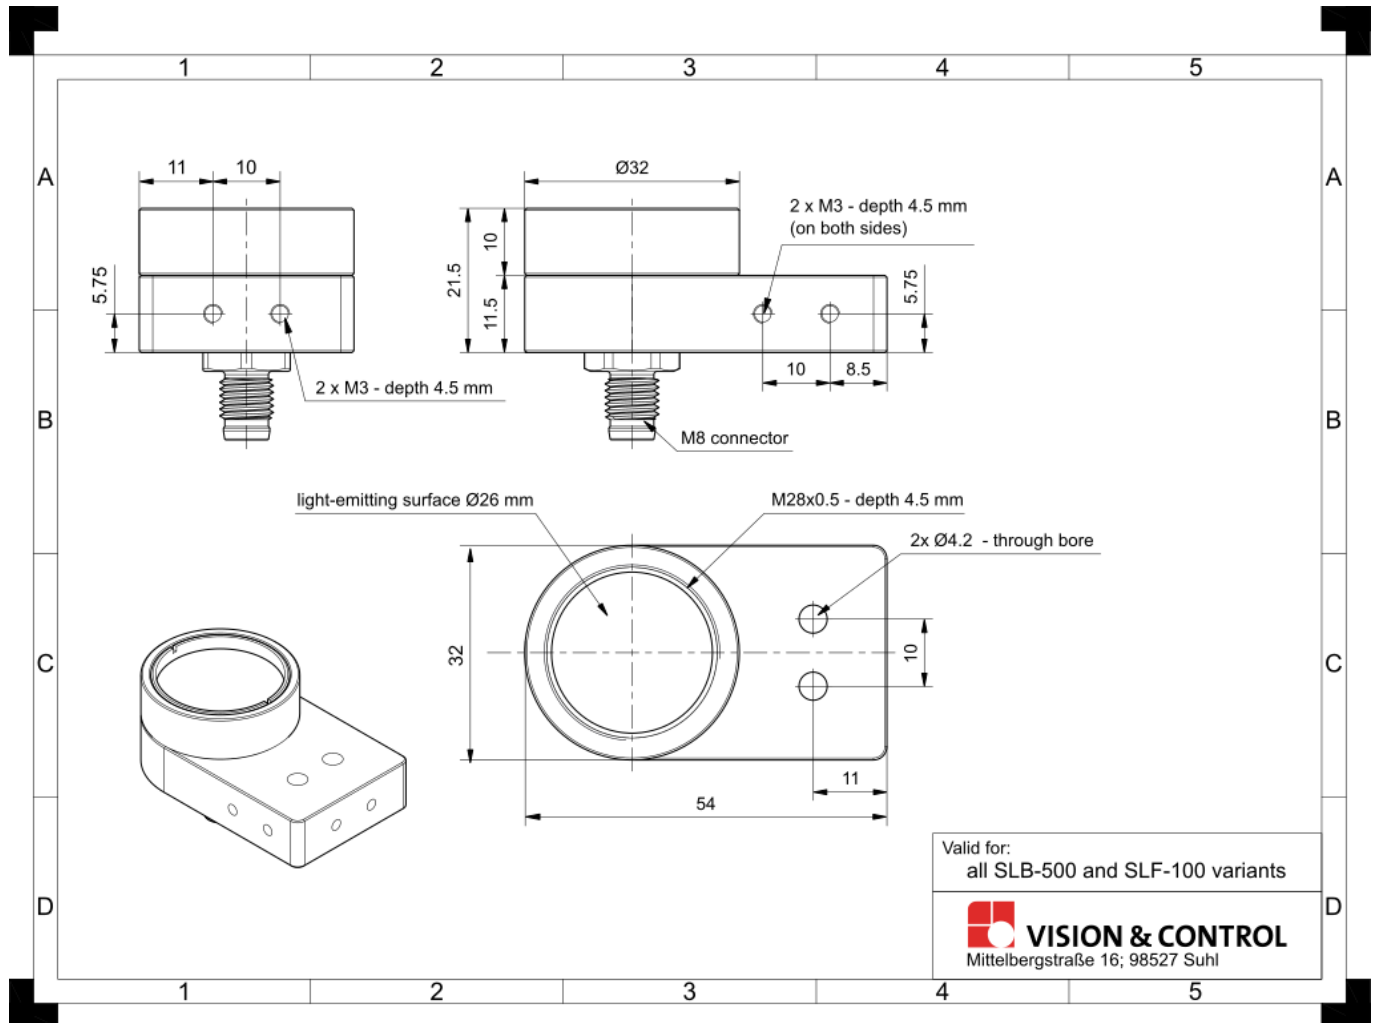

Dimensional drawing in mm