


---

## vicolux® Bar Light - LLL7x25-W5K7/24V/EX/-a- Luminous Field Size 7 mm x 25 mm

---

|                           |                                                                                  |
|---------------------------|----------------------------------------------------------------------------------|
| <b>Short description:</b> | bar light, white, lenticular, lf-size: 7 mm x 25 mm, static/switchable, external |
| <b>Order number:</b>      | 1-34-566                                                                         |
| <b>EAN:</b>               | 4251692676646                                                                    |



---

### Characteristics

- LED bar light with direct illumination and focusing lenticular lens
  - homogeneous illumination
  - lighting controller external
  - continuous or pulsed operation
  - brightness pre-set, flash duration corresponds to pulse-length
  - connection: M5 plug at lighting controller
  - metal casing, optical material: PMMA
  - multiple mounting options
  - new improved version ("-a")
-

---

## Technical data





|                           |                                 |
|---------------------------|---------------------------------|
| Luminous field            | 7 mm x 25 mm                    |
| Light colour              | White, 5700 K                   |
| Light design              | Lenticular                      |
| Irradiance                | 24 W/m <sup>2</sup>             |
| Illumination              | 8000 lx                         |
| Operation voltage         | 24 VDC (12 - 30 V)              |
| Ambient temperature       | -10°C bis +45°C                 |
| Degree of protection      | IP50                            |
| Housing material          | Aluminium black anodised        |
| Weight                    | 15 g                            |
| Risk group (DIN EN 62471) | Freie Gruppe                    |
| Safety class              | III, Schutzkleinspannung (SELV) |

---

## Accessories for Area and Bar lights - LLL7x25-W5K7/24V/EX/-a

| Order number                          | Title                      | Description                                                                           |
|---------------------------------------|----------------------------|---------------------------------------------------------------------------------------|
| <b>Mounting Systems</b>               |                            |                                                                                       |
| 1-16-826                              | Tension clamp LxL7 series  | for variable attachment and extension of the LxL7 series, l=25mm, w=17mm              |
| <b>Polarisers for 7 mm Bar Lights</b> |                            |                                                                                       |
| 1-16-901                              | Polarizer 7x25, linear     | for LxL7x25, 400 - 700 nm, plate thickness 0.2 mm, self-adhesive                      |
| <b>Connection cable M5-4pin</b>       |                            |                                                                                       |
| 1-11-117                              | Cable-M5-4p-1A-straight-2m | 4x0.14mm <sup>2</sup> , 1A, 60V, PUR, IP67, M5-4pin straight socket to free cable end |
| 1-11-116                              | Cable-M5-4p-1A-straight-5m | 4x0.14mm <sup>2</sup> , 1A, 60V, PUR, IP67, M5-4pin straight socket to free cable end |
| 1-11-105                              | Cable-M5-4p-1A-angled-2m   | 4x0.14mm <sup>2</sup> , 1A, 60V, PUR, IP67, M5-4pin angled socket to free cable end   |
| 1-11-104                              | Cable-M5-4p-1A-angled-5m   | 4x0.14mm <sup>2</sup> , 1A, 60V, PUR, IP67, M5-4pin angled socket to free cable end   |

## Drawings

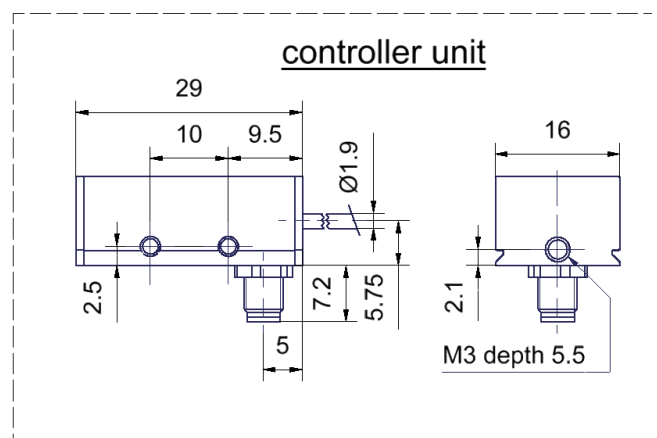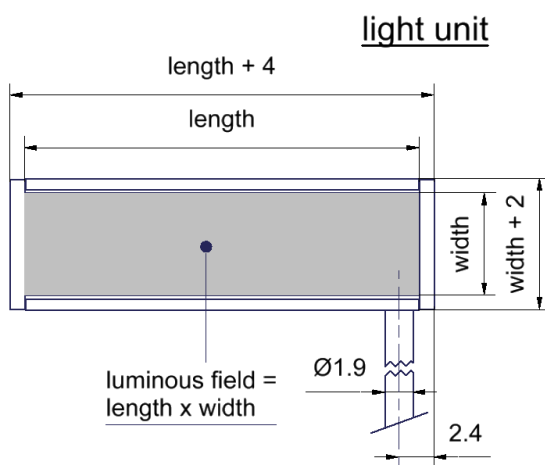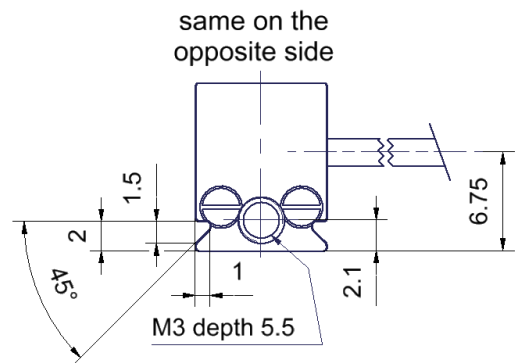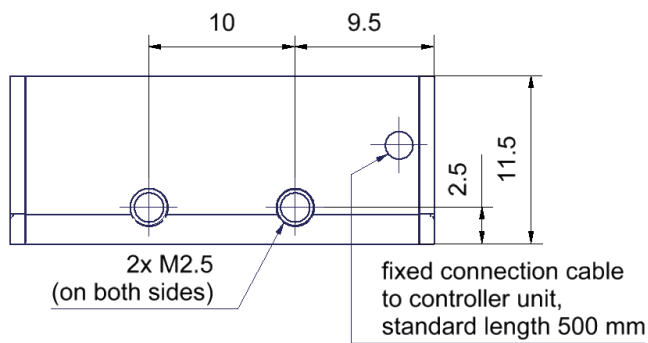

Dimensional drawing in mm: length = 25 mm; width = 7 mm

| Function          | Symbol | Cable Colour* | Pin | Contact arrangement |
|-------------------|--------|---------------|-----|---------------------|
| Operating Voltage | V+     | brown         | 1   |                     |
| Ground            | GND    | blue          | 3   |                     |
| Switch Input      | ON/OFF | black         | 4   |                     |
| Not connected     | NC     | white         | 2   |                     |

\* for recommended accessories

Pin assignments, M5 connector