
vicotar® Telecentric Lens - TO88/21.5-140-V-BW

Short description:	Telecentric Lens, C-Mount, Sensor opt. Typ 4/3, aperture F8 - F22, blue
Order number:	2-05-814
EAN:	4251692621653
Actual Notice:	Also available with fixed aperture on request. (F-numbers in the range as for adjustable aperture)



Characteristics

- telecentric measurement objective with object-sided telecentric beam path
 - color corrected for the visible spectral range and near infrared
 - color correction extended deep into the blue spectral range
 - very well suited for blue LEDs including "Deep Blue" LEDs
 - thus especially suitable for white LEDs, as these have a strong blue light component
 - high resolution, low lateral chromatic aberration, low distortion, low telecentric error
 - adjustable aperture with identification of the aperture numbers, arrestable
 - robust industrial design
-

Technical data

Image scale	0.244
Spectral range	400 nm - 900 nm
Working distance	140 mm
Camera distance (object-camera flange)	377.1 mm
Object field diagonal (max.)	88 mm
Sensor format (opt.)	Type 4/3
Image field diagonal (max.)	21.5 mm
Suitable for camera resolution	71.8 MPixel
Recommended pixel size	1.77 μm
Aperture	variable (F8 - F22)
Lens mount	C-Mount
Filter thread, object-side	M100 x 1
Filter thread, camera-side	M20.5 x 0.5
Weight	1125 g
Usable object field with:	
• Sensor type 4/3 (17.3 x 13.0 mm ²)	70.9 mm x 53.3 mm
• 1" sensor (12.8 x 9.6 mm ²)	52.5 mm x 39.3 mm
• 2/3" sensor (8.8 x 6.6 mm ²)	36.1 mm x 27 mm

Notices

The lightings combination products shown are a selection. Depending on the application, other colors and light source types can also be used.

Can be combined with

Order number	Title	Description
<i>TZB95-UDC-a Serie</i>		
1-10-951	TZB95-B470/UDC/-a	telecentric light, blue, If diameter: 95 mm, flashable by flash controller
1-10-952	TZB95-W5K7/UDC/-a	telecentric light, white, If diameter: 95 mm, flashable by flash controller
1-10-953	TZB95-IR880/UDC/-a	telecentric light, IR850, If diameter: 95 mm, flashable by flash controller
1-10-950	TZB95-R625/UDC/-a	telecentric light, red, If diameter: 95 mm, flashable by flash controller
1-10-954	TZB95-G525/UDC/-a	telecentric light, green, If diameter: 95 mm, flashable by flash controller
<i>TZB95 series</i>		
1-10-383	TZB95-B470-24V	telecentric light, blue, If diameter: 95 mm, static, cable open-ended
1-10-382	TZB95-W5K7-24V	telecentric light, white, If diameter: 95 mm, static, cable open-ended
1-10-381	TZB95-IR880-24V	telecentric light, IR850, If diameter: 95 mm, static, cable open-ended
1-10-380	TZB95-R625-24V	telecentric light, red, If diameter: 95 mm, static, cable open-ended
1-10-384	TZB95-G525-24V	telecentric light, green, If diameter: 95 mm, static, cable open-ended
<i>R-CLR-100-SL series</i>		
1-33-012	R-CLR-100x73-B470-SL	ring light, blue, coaxial, If diameter: 73/100 mm, smart light technology
<i>RK3652-24V series</i>		
1-29-702	RK3652-B470-24V/C	ring light, blue, coaxial, If diameter: 73/100 mm, controlled, pot.: 0-10V,
<i>R-CLR-132-SL series</i>		
1-33-017	R-CLR-132x104-B470-SL	ring light, blue, coaxial, If diameter: 104/132 mm, smart light technology
<i>RK5268-24V series</i>		

Order number	Title	Description
1-29-802	RK5268-B470-24V/C	ring light, blue, coaxial, If diameter: 104/132 mm, controlled, pot.: 0-10V,


Accessories for Telecentric Lenses - T088/21.5-140-V-BW

Order number	Title	Description
Adjustment Aids		
5-10-112	Adjustment aid 10	for easy adjustment to 10 mm depth of field, for image scale 0.5 - 0.2
Lens mount		
2-91-331	Mounting angle	Holder for telecentric lenses and lightings with with threaded hole M5
2-91-332	Mounting angle SH	Holder for telecentric lenses and lightings with with slotted hole for M4-M6
2-91-333	Mounting plate SH	Holder for telecentric lenses and lightings with with slotted hole for M4-M6
2-91-330	Lens Holder d45 wide	Holder for telecentric lenses and lightings with d = 45 mm, width = 32 mm
2-91-334	Mounting Bracket T088	Holder for telecentric lenses of the series T088 with threaded hole M5
Extension tubes		
2-90-415	Extension ring 0.5 mm	26 x 31 x 0.5 reduces the minimum object distance (MOD)
2-90-416	Extension ring 1.0 mm	26 x 31 x 1.0 reduces the minimum object distance (MOD)
2-90-419	Extension ring 0.1 mm	25.5 x 29 x 0.1 reduces the minimum object distance (MOD)
2-90-420	Extension ring 0.2 mm	25.5 x 29 x 0.2 reduces the minimum object distance (MOD)
Thread adapter c-mount		
5-00-011	Thread adapter C-Mount-M42	Adapter for mounting of lenses with C-mount on cameras with M42x1 mount
2-90-414	CS to C-mount adapter 5.0 mm	for connecting C-mount lenses with CS-mount cameras, length: 5 mm

Order number	Title	Description
<i>Daylight blocking filter</i>		
2-91-131	IR filter M20.5x0.5	long-pass filter from 830 nm, daylight absorbing filter, filter thread M20.5x0.5
2-91-136	IR filter M100x1	long-pass filter from 830 nm, daylight absorbing filter, filter thread M100x1
<i>Polarising filters</i>		
2-91-148	Pole filter M105x1	linear polarizing filter, range 420 nm - 780 nm, filter thread M105x1
<i>Colour filter blue</i>		
2-91-292	Colour filter blue M100x1	band-pass filter, range 350 nm - 600 nm, filter thread M100x1
<i>UV Cut-Off Filter</i>		
2-91-209	UV blocking filter M100x1	long-pass filter from 350 nm, usable as protective glass, filter thread M100x1
<i>Colour filter red</i>		
2-91-259	Colour filter red M20.5x0.5	long-pass filter from 630 nm, red, filter thread M20.5x0.5
2-91-264	Colour filter red M100x1	long-pass filter from 630 nm, red, filter thread M100x1
<i>Colour filter green</i>		
2-91-305	Colour filter green M100x1	band-pass filter, range 430 nm - 620 nm, filter thread M100x1
<i>Colour filter yellow</i>		
2-91-281	Colour filter yellow M100x1	long-pass filter from 530 nm, yellow, filter thread M100x1
<i>Filter adapter</i>		
2-91-338	Filter adapter M100-M105	step-up ring for use of a M105x1 filter on a M100x1 filter thread
<i>Adapters for attaching lights to lenses</i>		
1-29-774	Adapter ring d73 - M100x1	for R-CLR-100x73 und RK3652, for attachment to lenses with filter thread M100x1

Order number	Title	Description
1-29-872	Adapter ring d104 - M100x1	for R-CLR-132x104 and RK5268, for attachment to lenses with filter thread M100x1
Beam splitter STE60x60		
1-20-050	STE60x60-VIS	Beam splitter unit for coaxial light system, optimized for 450-700 nm
1-20-025	Adapter STE60x60 - TZ0104	Attachment of the STE60x60 to telecentric lenses and lightings with d= 104 mm

Drawings

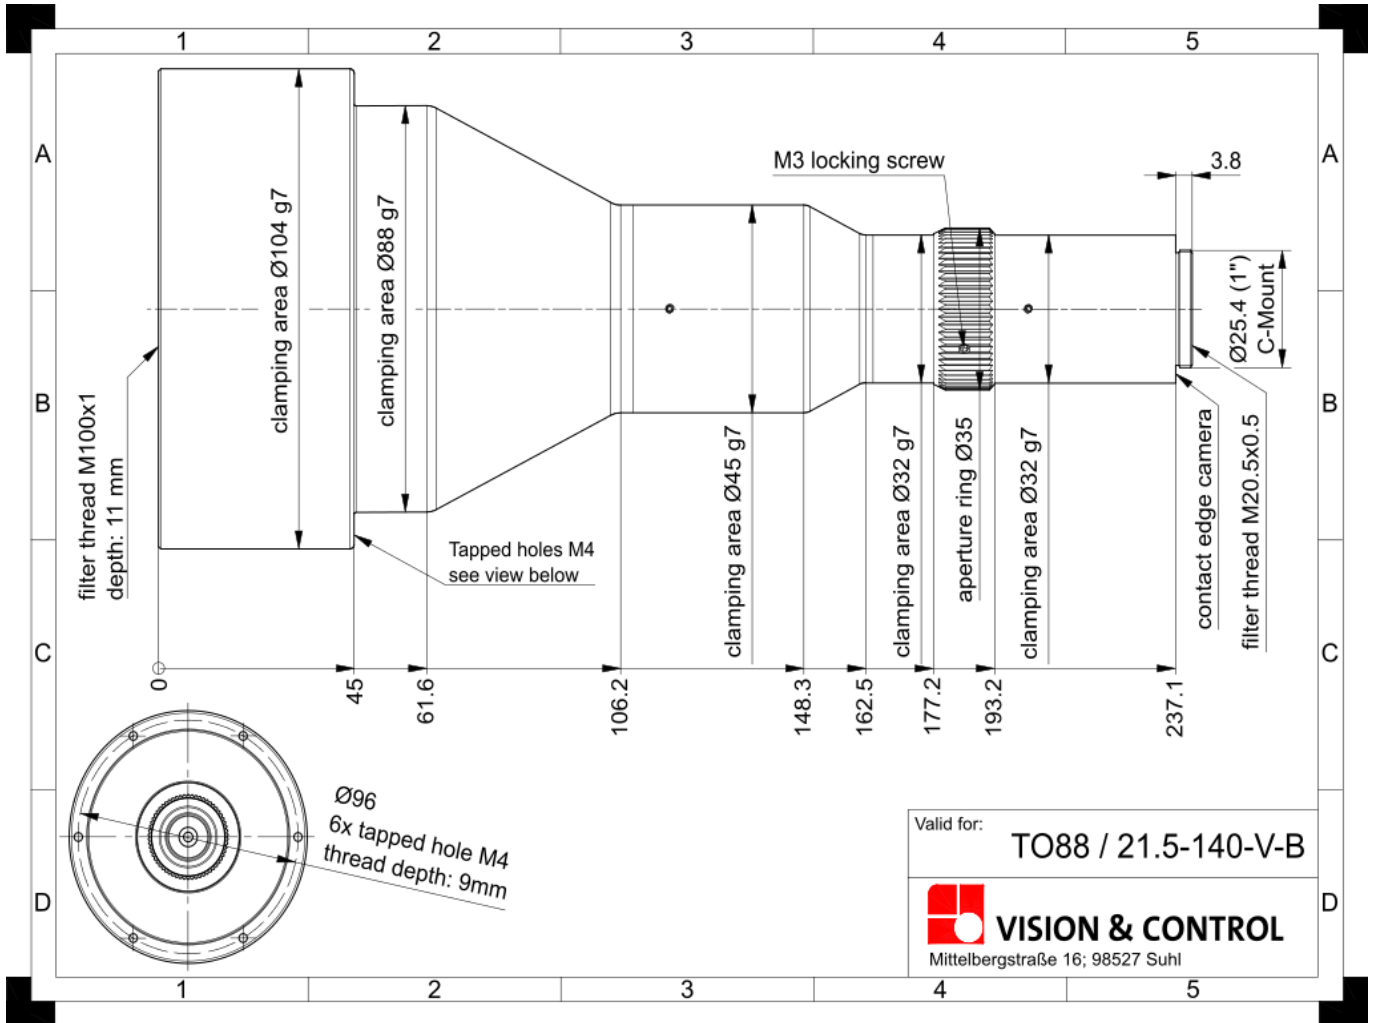

Dimensional drawing in mm