Vision & Control GmbH
Phone: +49 36 81 / 79 74 11
www.vision-control.com

Neutral density filter - ND filter 0.6 M39x0.5

Short description: optical density 0.6 - 25% transmission, f-stop reduction 2, filter thread M39x0.5

Order number: 2-91-150

Characteristics

- to reduce the image brightness without changing the spectral distribution or the depth of field
- can be used for extremely bright inspection tasks such as welding processes or melting, drawing and ignition processes
- to avoid overexposure, blooming and smearing and to protect light-sensitive sensors
- easy to assemble thanks to the black anodized brass mount

Vision & Control GmbH
Phone: +49 36 81 / 79 74 11
www.vision-control.com

Technical data

Filter type	Neutral density filter
Housing material	Filter mount: brass
Optical material	Glass
Thickness optical material	2 mm
Weight	16 g
Mounting	Screw-in socket
Filter thread	M39 x 0.5

Vision & Control GmbH
Phone: +49 36 81 / 79 74 11
www.vision-control.com

Drawings

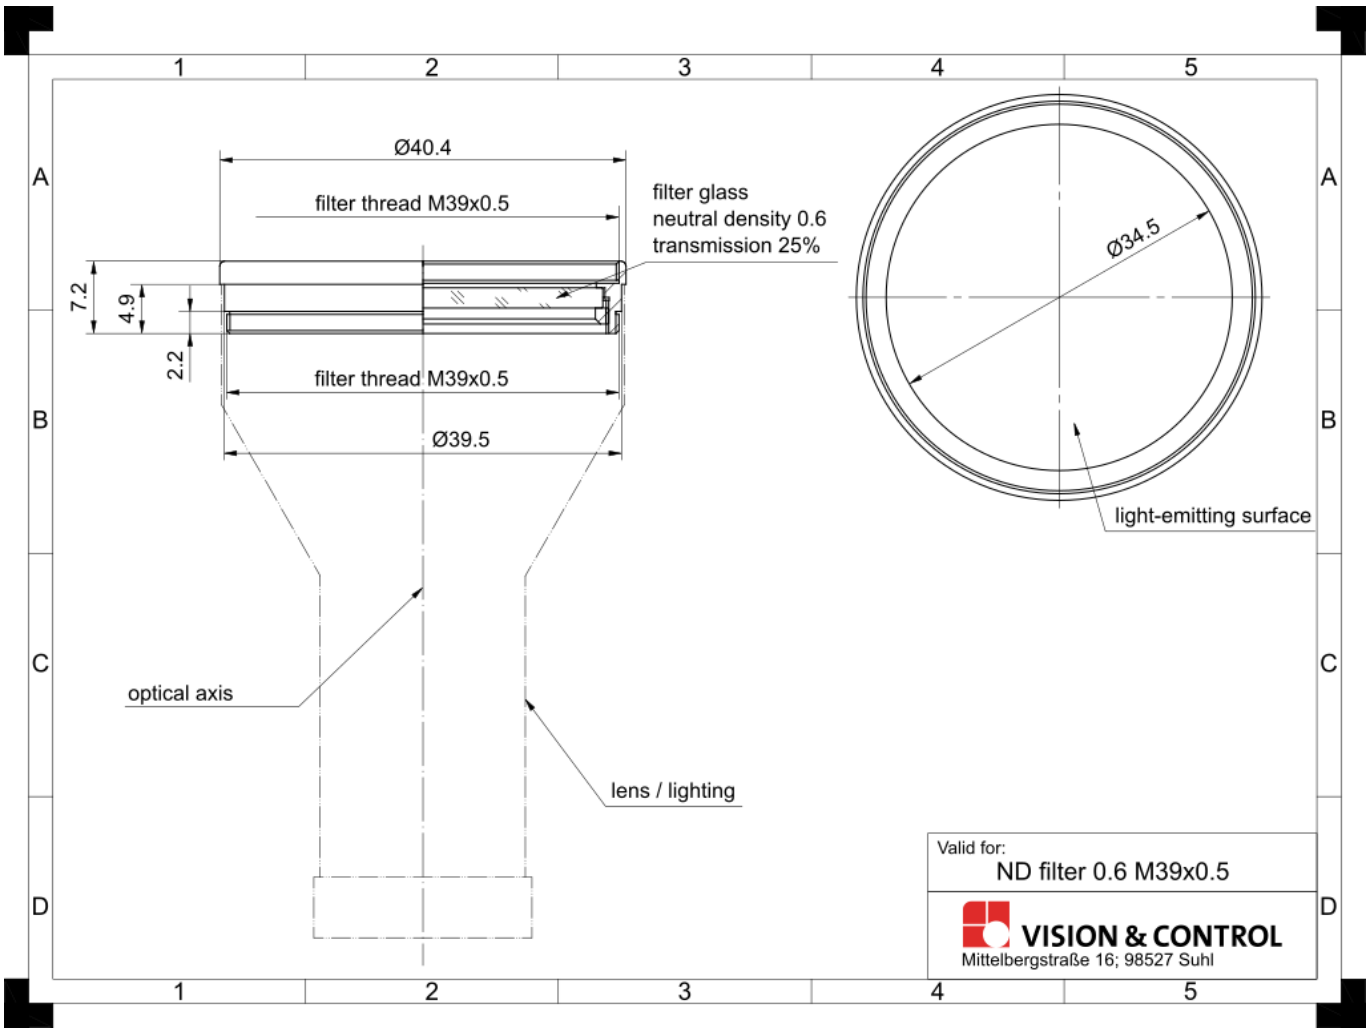

Dimensional drawing in mm