
Camera for Multi-Camera Systems - BFS-PGE-19S4M-C PoE

Short description: PoE - Gigabit Ethernet Camera 1/1.7" CMOS,
1616x1240, 60fps, mono, global shutter

Order number: 3-12-574

This product is being replaced!



Characteristics

- ultra-compact GigE area scan camera for industrial applications
 - 1/1.7" CMOS monochrom sensor with 2 megapixel resolution
 - industrial GigE Vision interface with Power over Ethernet
 - RJ45 Ethernet connection with screw connector for safe operation
 - C-mount lens connection
-

Technical data

Sensor Data

Sensor name	Sony IMX430
Chroma	Monochrome
Sensor technology	CMOS
Readout method	Global Shutter
Sensorformat	1/1.7"
Sensor diagonal	9.2 mm
Resolution total	1616 x 1240
Number of pixel	2.0 MPixel
Pixel size	4.5 µm x 4.5 µm
Frame rate	60 fps
Shutter (exposure time)	14 µs ... 30 s
Gain control	0 dB ... 47 dB
Dynamic range	70.95 dB

Camera Data

Family	Flir - Blackfly®S
Type	GigE Vision area scan camera
Interfaces	GigE Vision with PoE opto-decoupled I/Os 1x IN, 1x OUT

General Data

Power requirements	Power over Ethernet (PoE) 8 V - 24 VDC AUX (6-pin Hirose)
Power consumption	4.2 W (PoE); 3.6 W (at 12 VDC)
Lens mount	C-Mount
Dimensions	29 mm x 29 mm x 39 mm
Weight	53 g

Operating temperature


0 °C ... 50 °C

Accessories for Cameras for Multi-Camera Systems - BFS-PGE-19S4M-C PoE

Order number	Title	Description
Ethernet Cables		
4-44-182	GigE cable, CAT.6, DC, 3m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-192	GigE cable, CAT.6, T, 3m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-186	GigE cable, CAT.6, 3m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-189	GigE cable, CAT.6, 3m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-183	GigE cable, CAT.6, DC, 5m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-193	GigE cable, CAT.6, T, 5m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-187	GigE cable, CAT.6, 5m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-190	GigE cable, CAT.6, 5m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-184	GigE cable, CAT.6, DC, 10m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-194	GigE cable, CAT.6, T, 10m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-188	GigE cable, CAT.6, 10m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-191	GigE cable, CAT.6, 10m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-185	GigE cable, CAT.6, DC, 25m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-40-120	GigE cabel, CAT.6a, 3m	RJ45/RJ45, 1200 MHz, grey, for GigE Vision cameras
PLC-Power Cables		
4-44-199	PLC-power cable, 6p, DC, 5m	HR10A-7P-6S, plug with socket contacts to open cable end, drag chain capable

Order number	Title	Description
4-44-200	PLC-power cable, 6p, DC, 10m	HR10A-7P-6S, plug with socket contacts to open cable end, drag chain capable

Drawings

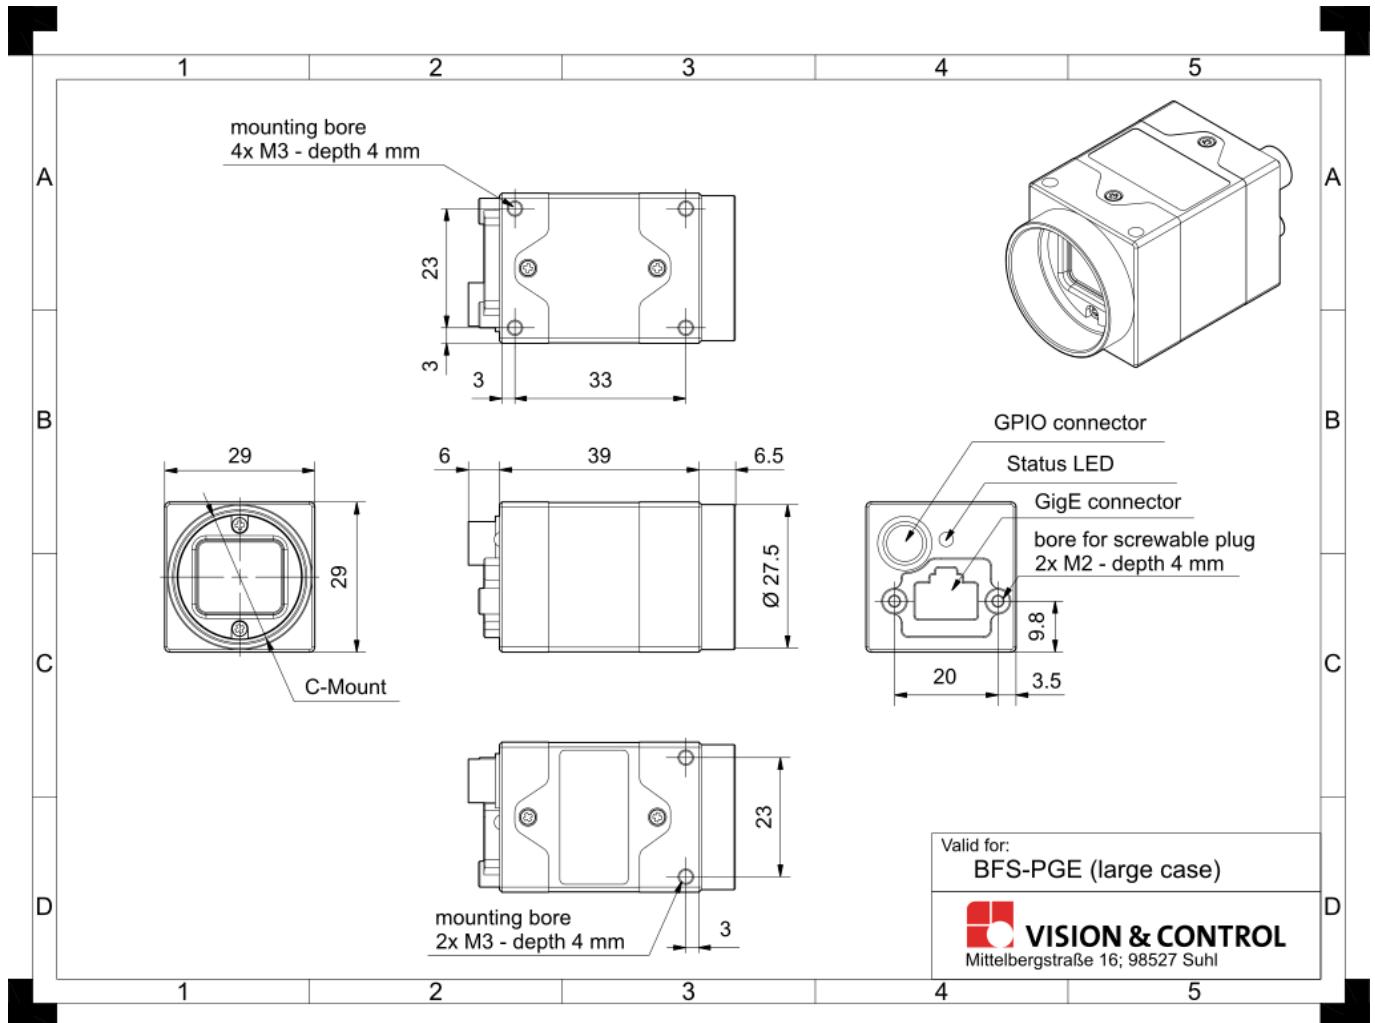

Dimensional drawing in mm