
Camera for Multi-Camera Systems - Prosilica GT1290C PoE

Short description: PoE - Gigabit Ethernet Camera 1/3" CCD,
1280x960, 33fps, colour, global shutter

Order number: 3-12-581



Characteristics

- GigE area scan camera for industrial applications
 - 1/3" CCD colour sensor with 1.2 megapixel resolution
 - extended temperature range for use in harsh industrial environments
 - industrial GigE Vision interface with Power over Ethernet
 - RJ45 Ethernet connection with screw connector for safe operation
 - C-mount lens connection
-

Technical data

Sensor Data

Sensor name	Sony ICX445AQA
Chroma	Farbe
Sensor technology	Interline CCD, Progressive Scan
Readout method	Global Shutter
Sensorformat	1/3"
Sensor diagonal	6.0 mm
Resolution total	1280 x 960
Number of pixel	1.2 MPixel
Pixel size	3.75 µm x 3.75 µm
Frame rate	33.3 fps
Shutter (exposure time)	12 µs ... 77.3 s
Gain control	0 dB ... 27 dB
Dynamic range	58.3 dB

Camera Data

Family	AVT - Prosilica GT
Type	GigE Vision area scan camera
Interfaces	GigE Vision with PoE opto-decoupled I/Os 1x IN, 2x OUT

General Data

Power requirements	Power over Ethernet (PoE) 7 V - 25 VDC AUX (12-pin Hirose)
Power consumption	3.5 W (PoE); 2.9 W (at 12 VDC)
Lens mount	C-Mount
Dimensions	86 mm x 53.3 mm x 33 mm (including connectors)
Weight	211 g


Operating temperature	-20 °C ... 65 °C
-----------------------	------------------

Accessories for Cameras for Multi-Camera Systems - Prosilica GT1290C PoE

Order number	Title	Description
Ethernet Cables		
4-44-182	GigE cable, CAT.6, DC, 3m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-192	GigE cable, CAT.6, T, 3m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-186	GigE cable, CAT.6, 3m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-189	GigE cable, CAT.6, 3m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-183	GigE cable, CAT.6, DC, 5m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-193	GigE cable, CAT.6, T, 5m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-187	GigE cable, CAT.6, 5m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-190	GigE cable, CAT.6, 5m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-184	GigE cable, CAT.6, DC, 10m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-44-194	GigE cable, CAT.6, T, 10m	RJ45/RJ45, 1 x screw lock, torsion-capable: $\pm 180^\circ/\text{m}$, for GigE Vision cameras
4-44-188	GigE cable, CAT.6, 10m, 90°d	RJ45/RJ45, 90° angled downwards, in tight spaces, for GigE Vision cameras
4-44-191	GigE cable, CAT.6, 10m, 90°u	RJ45/RJ45, 90° angled upwards, in tight spaces, for GigE Vision cameras
4-44-185	GigE cable, CAT.6, DC, 25m	RJ45/RJ45, 1 x screw lock, drag chain capable, for GigE Vision cameras
4-40-120	GigE cabel, CAT.6a, 3m	RJ45/RJ45, 1200 MHz, grey, for GigE Vision cameras
PLC-Power Cables		
4-44-197	PLC-power cable, 12p, DC, 5m	HR10A-10P-12S, plug with socket contacts to open cable end, drag chain capable

Order number	Title	Description
4-44-198	PLC-power cable, 12p, DC, 10m	HR10A-10P-12S, plug with socket contacts to open cable end, drag chain capable


Drawings

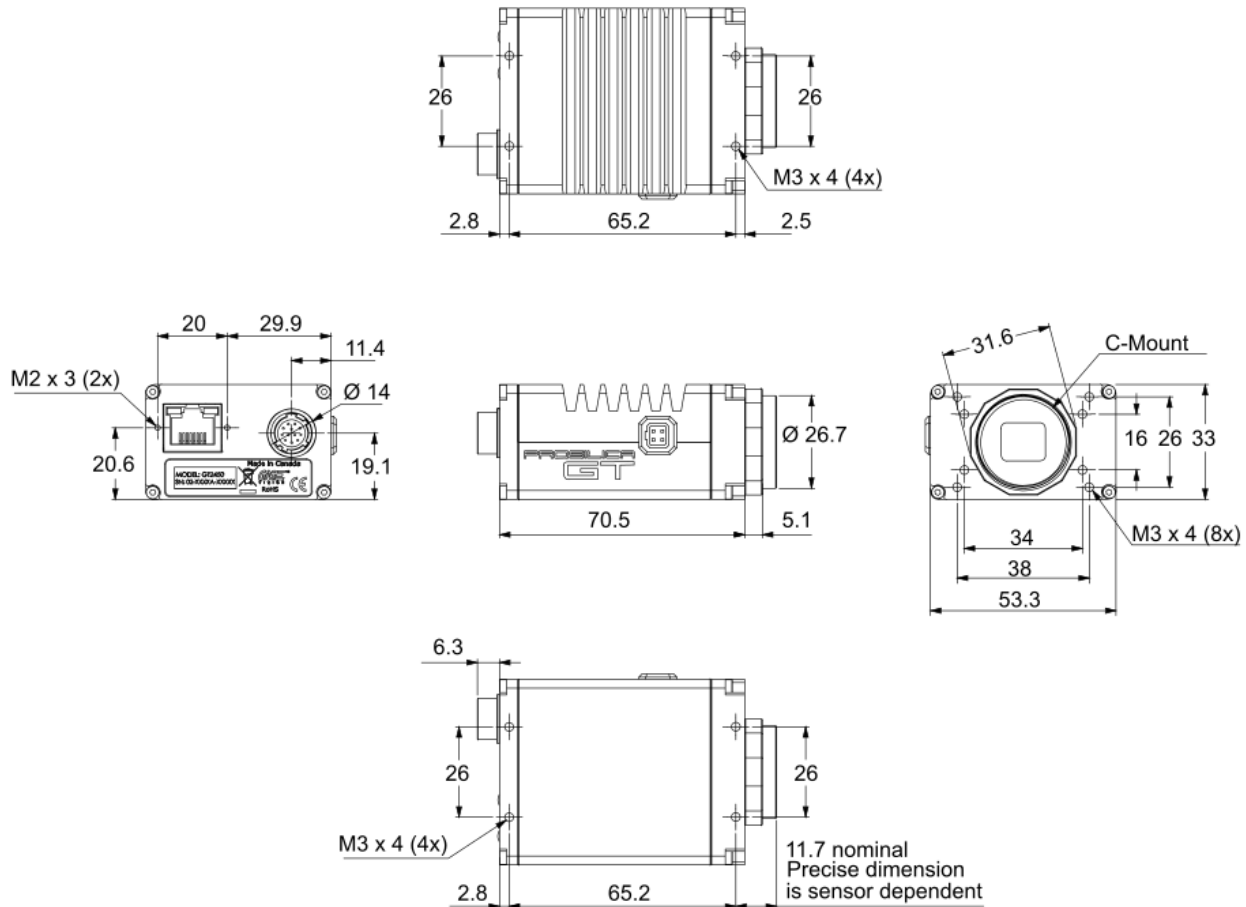


Models: Prosilica GT1290, GT1380, GT1600, GT2000, GT2050, GT2450, GT2460
Mount: C-Mount (default)

Dimensional drawing in mm

Absolute Quantum Efficiency

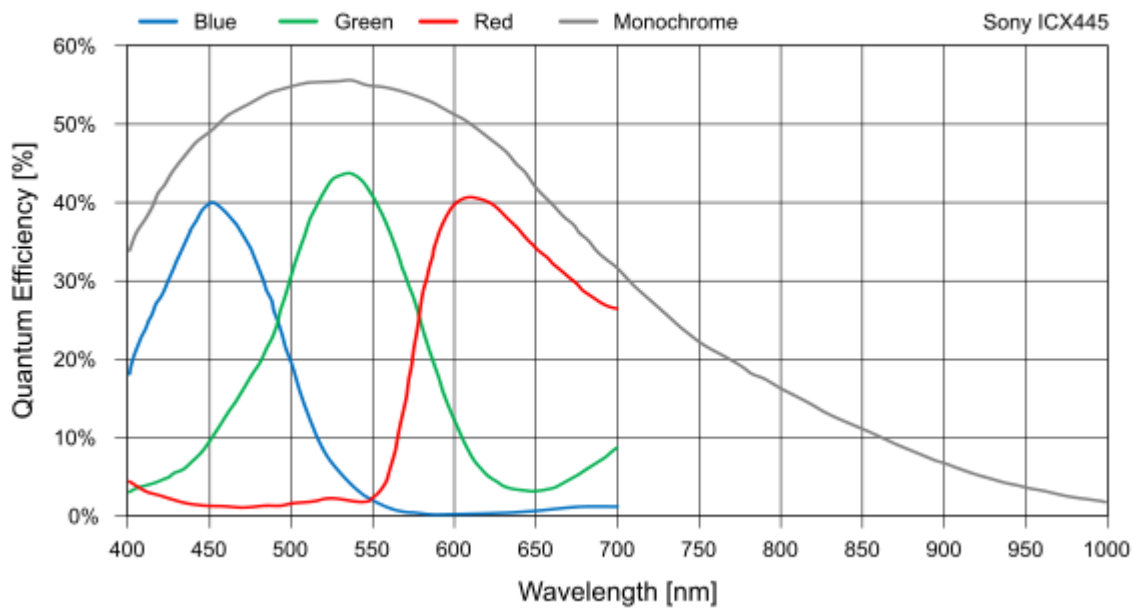

Spectral Response

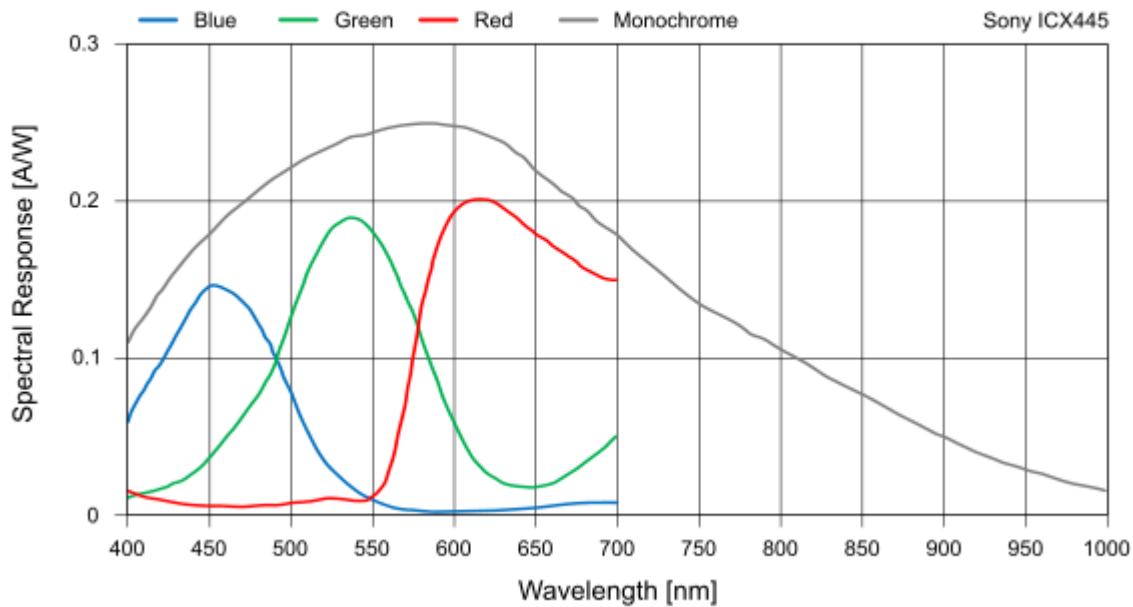

Absolute QE / Spectral response