
Camera for Multi-Camera Systems - Triton2 TRT024G-MC C-Mount

Short description: 2.5GigE-Camera, mono, C-Mount, 2.4 MP, 2,048 x 1,200 Pixel, 1/1.7"

Order number: 3-12-929



Characteristics

- 2.5G Areascan Camera for industrial applications
 - 1/1.7" Sensor with 2,048 x 1,200 resolution (mono)
 - with Power over Ethernet
 - Housing (44 × 29 × 45.3 mm) with Protection Class IP67
 - for extended ambient temperature range of -20°C to 55°C
-

Technical data

Sensor Specification

Sensor name	Gpixel GMAX4002
Spectrum	VIS
Shutter technology	Global Shutter
Sensor format	1/1.7"
Sensor diagonal [mm]	9.5
Total resolution [Pixel]	2,048 x 1,200
Total pixel [MP]	2.4
Pixel size [µm]	4
Sensor technology	GMAX
Sensor alternatives (same technology)	GMAX4002


Camera Specification

Family	LUCID Triton2 2.5GigE
Protocol	GigE
Type	Areascan Camera
IR blocking filter	no
LAN speed [MBit/s]	2500
Protection class	IP67
Frame rate [fps]	107.2

General Information

POE	Yes
Lens Mount	C-Mount
Weight [g]	90
Housing dimensions	44 mm x 29 mm x 45 mm

Drawings

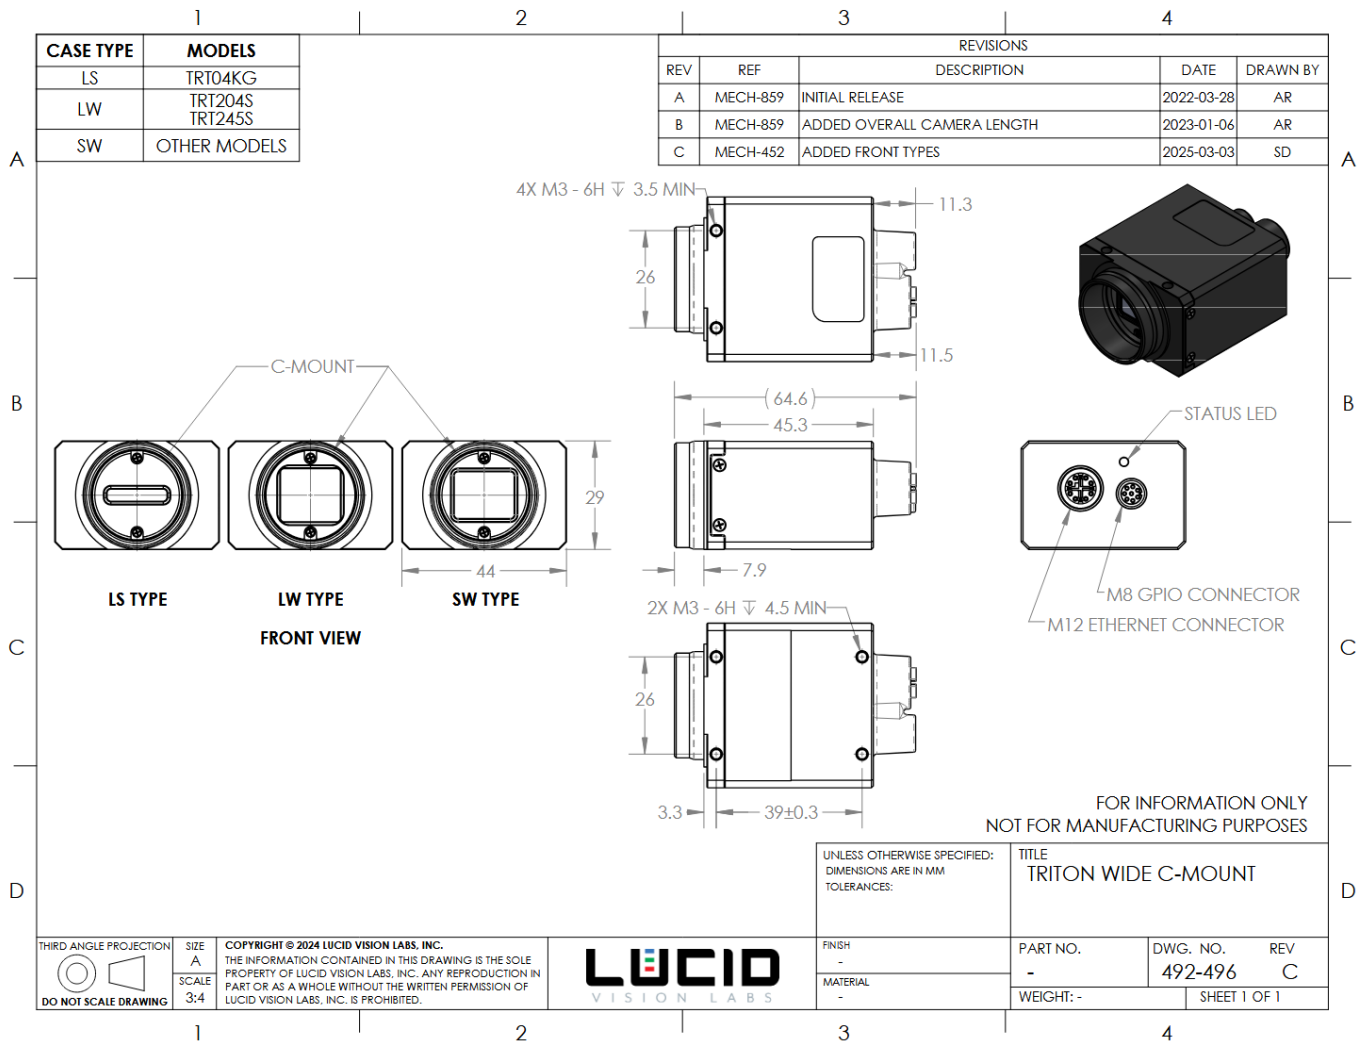

Dimensional drawing in mm

