
Camera for Multi-Camera Systems - Triton2 TRT064S-CC C-Mount

Short description: 2.5GigE-Camera, color, C-Mount, 6.3 MP, 3,072 x 2,048 Pixel, 1/1.8"

Order number: 3-12-936



Characteristics

- 2.5G Areascan Camera for industrial applications
 - 1/1.8" Sensor with 3,072 x 2,048 resolution (color)
 - with Power over Ethernet
 - Housing (44 × 29 × 45.3 mm) with Protection Class IP67
 - for extended ambient temperature range of -20°C to 55°C
-

Technical data

Sensor Specification

Sensor name	Sony IMX178
Spectrum	VIS
Shutter technology	Rolling Shutter
Sensor format	1/1.8"
Sensor diagonal [mm]	8.92
Total resolution [Pixel]	3,072 x 2,048
Total pixel [MP]	6.3
Pixel size [µm]	2.4
Sensor technology	Starvis
Sensor alternatives (same technology)	IMX178


Camera Specification

Family	LUCID Triton2 2.5GigE
Protocol	GigE
Type	Areascan Camera
IR blocking filter	Yes
LAN speed [MBit/s]	2500
Protection class	IP67
Frame rate [fps]	42.8

General Information

POE	Yes
Lens Mount	C-Mount
Weight [g]	90
Housing dimensions	44 mm x 29 mm x 45 mm

Drawings

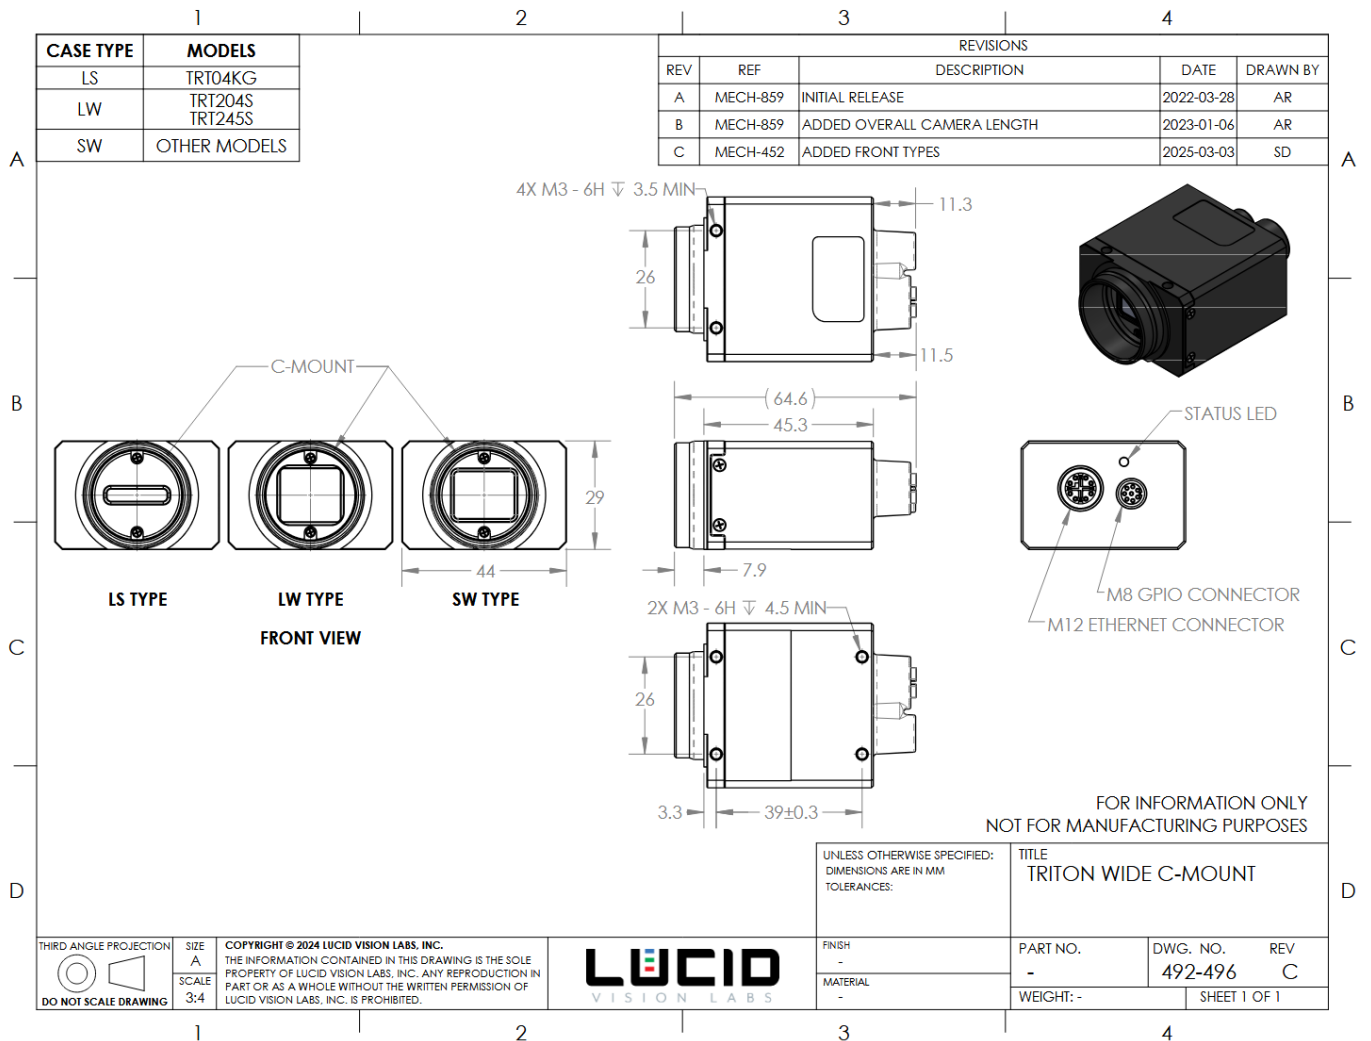

Dimensional drawing in mm

