
Camera for Multi-Camera Systems - Triton2 TRT071S-MC C-Mount

Short description: 2.5GigE-Camera, mono, C-Mount, 7.1 MP, 3,208 x 2,200 Pixel, 1.1"

Order number: 3-12-939



Characteristics

- 2.5G Areascan Camera for industrial applications
 - 1.1" Sensor with 3,208 x 2,200 resolution (mono)
 - with Power over Ethernet
 - Housing (44 × 29 × 45.3 mm) with Protection Class IP67
 - for extended ambient temperature range of -20°C to 55°C
-

Technical data

Sensor Specification

Sensor name	Sony IMX428
Spectrum	VIS
Shutter technology	Global Shutter
Sensor format	1.1"
Sensor diagonal [mm]	17.6
Total resolution [Pixel]	3,208 x 2,200
Total pixel [MP]	7.1
Pixel size [µm]	4.5
Sensor technology	Pregius (3. Gen)
Sensor alternatives (same technology)	IMX428


Camera Specification

Family	LUCID Triton2 2.5GigE
Protocol	GigE
Type	Areascan Camera
IR blocking filter	no
LAN speed [MBit/s]	2500
Protection class	IP67
Frame rate [fps]	35

General Information

POE	Yes
Lens Mount	C-Mount
Weight [g]	90
Housing dimensions	44 mm x 29 mm x 45 mm

Drawings

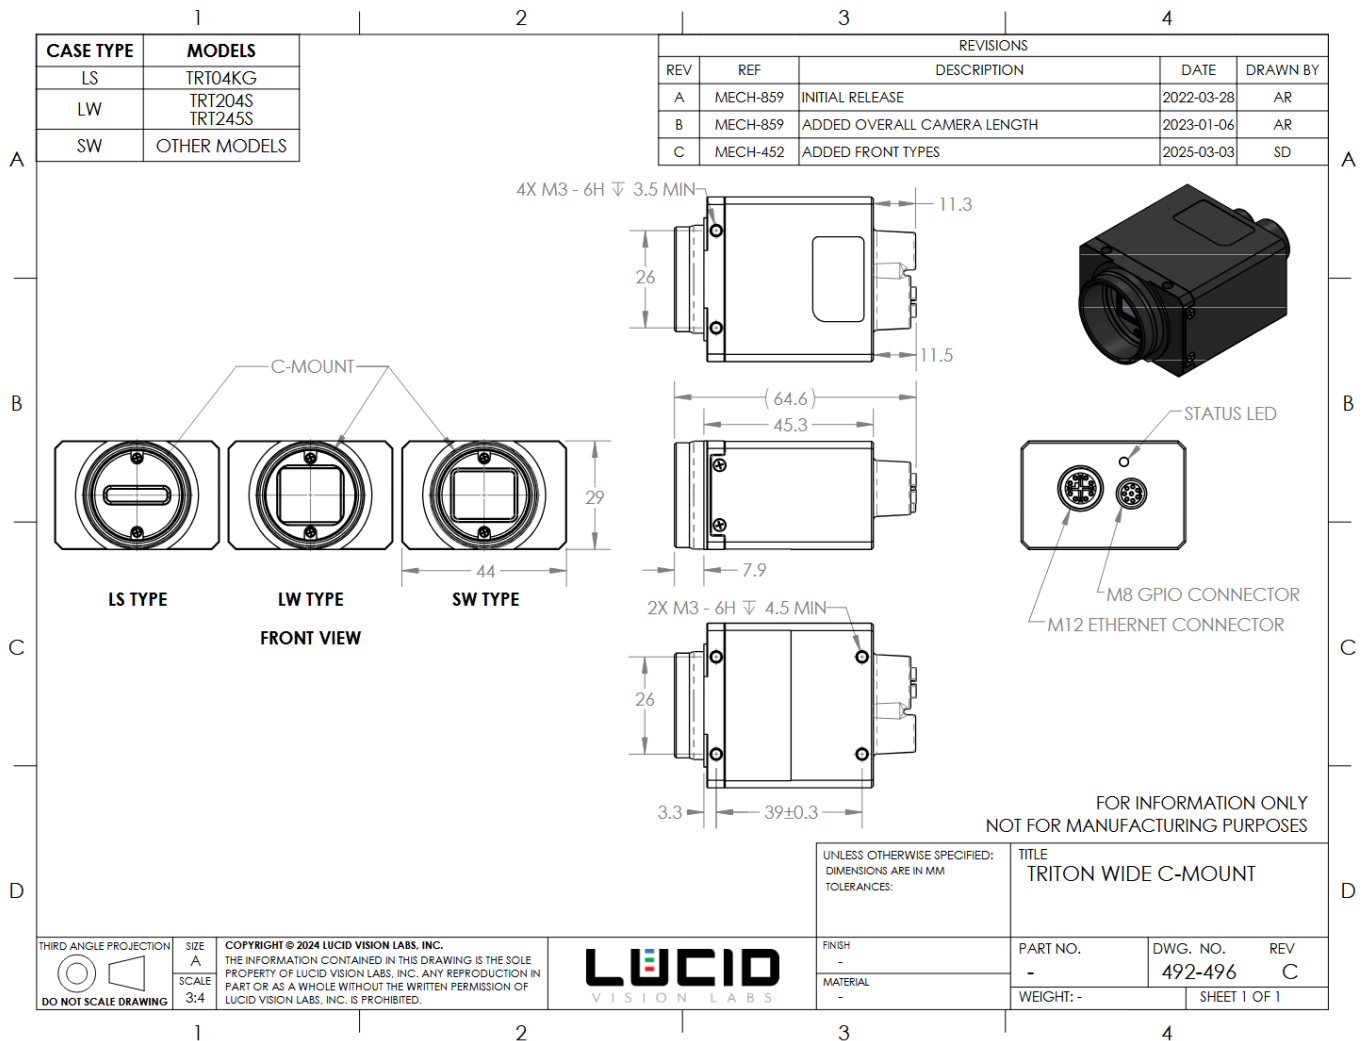

Dimensional drawing in mm

