
Accessory for Vision Systems - PLC-power cable, 8p, DC, 5m

Short description: HR25-7TP-8S, plug with socket contacts to open cable end, drag chain capable

Order number: 4-44-195




Characteristics

- PLC power cable for Cameras
 - suitable for drag chain applications
 - for the transmission of I/O signals and for power supply (alternative to PoE)
 - Cable end on the camera side: 8-pin HIROSE round connector
 - open cable end: not assembled
-

Technical data

Cabel type	PLC power cable suitable for drag chains
Connector A	Hirose Electronic HR25-7TP-8S round plug
Connector B	free cable end, not assembled
Cabel	
Cable length	5 m
Cable diameter	6.3 mm
Cable structure	10 x 0.14mm ²
Sheath material	PUR, halogen-free
Ambient temperature	fixed installation: -40 °C ... +80 °C flexible: -50 °C ... +80 °C
Drag chain suitable	yes
Bending radius	fixed installation: 25.2 mm (4 x Ø) flexible: 50.4 mm (8 x Ø)
Bending cycles	min. 1 million cycles
Robot-suitable	no
Usable with:	
Cameras for vicosys	Flir - Blackfly®S

Drawings

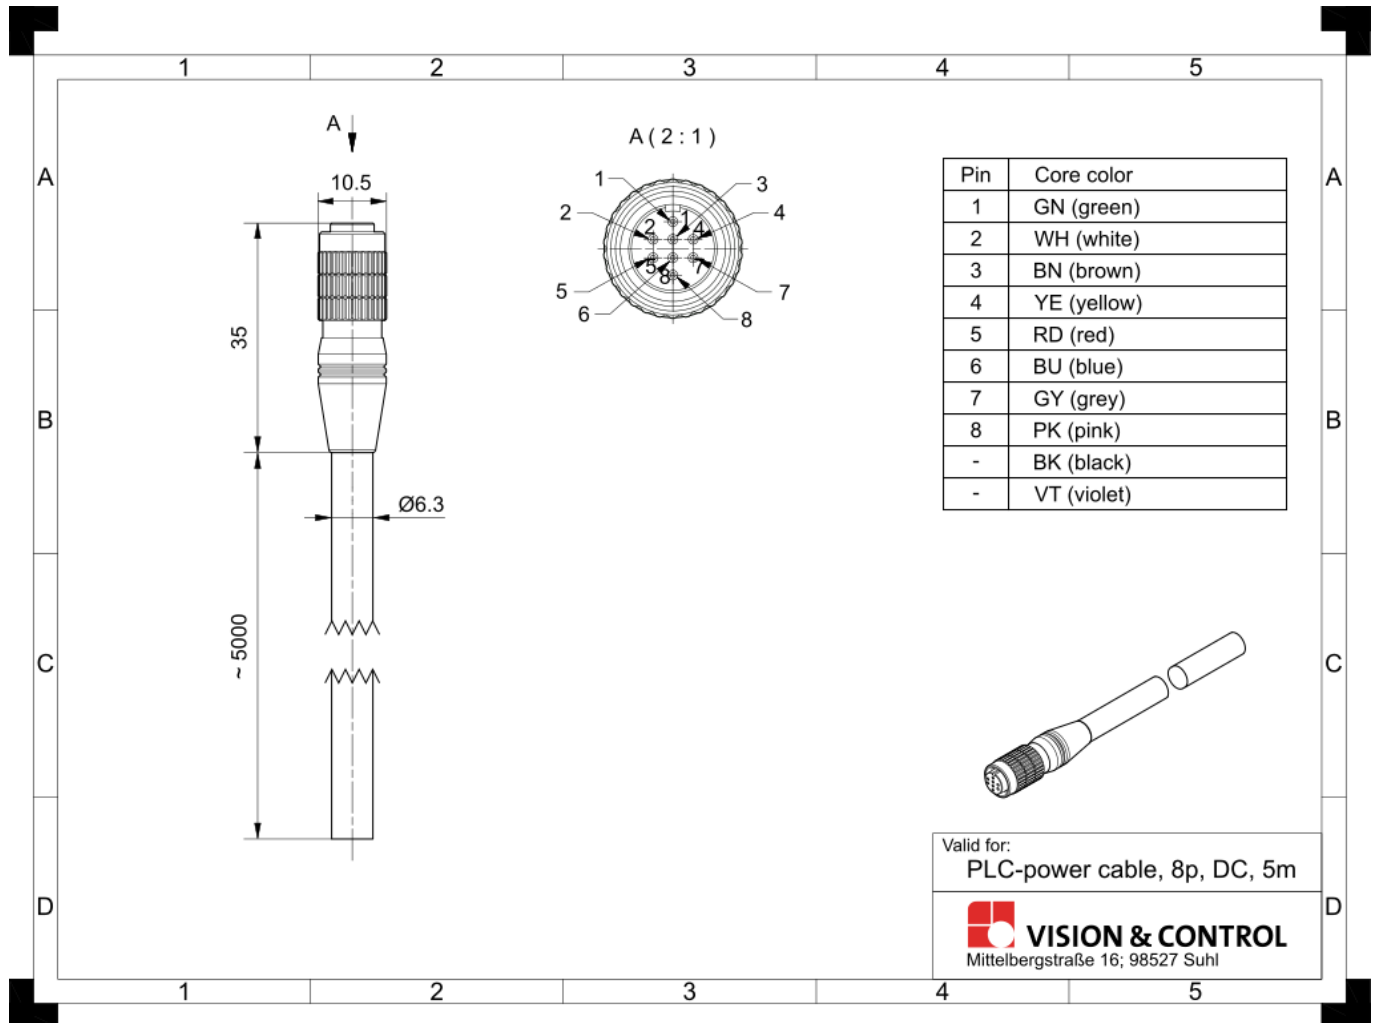

Dimensional drawing in mm