
Accessory for Vision Systems - GigE cable, CAT.6, DC, 10m

Short description: RJ45/RJ45, 1 x screw lock, drag chain capable, 
for GigE Vision cameras

Order number: 4-44-184


Characteristics

- Ethernet cable for GigE vision cameras
 - suitable for drag chain applications
 - 4-pair stranded for 10/100/1000Mbit/s Industrial Ethernet
 - HF-characteristics Cat.6 according to IEC 61156-6
 - 1 x RJ45 click-lock plug, molded
 - 1 x RJ45 click-lock plug, horizontally screwable, molded
-

Technical data

Cabel type	GigE patch cable, CAT.6 suitable for drag chains
Connector A	RJ45 with horizontal screw locking
Connector B	RJ45 standard
Cabel	
Cable length	10 m
Cable diameter	7.8 mm
Cable structure	4 x 2 x AWG26/19
Sheath material	PUR, halogen-free
Ambient temperature	fixed installation: -40 °C ... +80 °C flexible: -30 °C ... +70 °C
Drag chain suitable	yes
Bending radius	fixed installation: 31.2 mm (4 x Ø) flexible: 58.5 mm (7.5 x Ø)
Bending cycles	min. 1 million cycles
Robot-suitable	no

Drawings

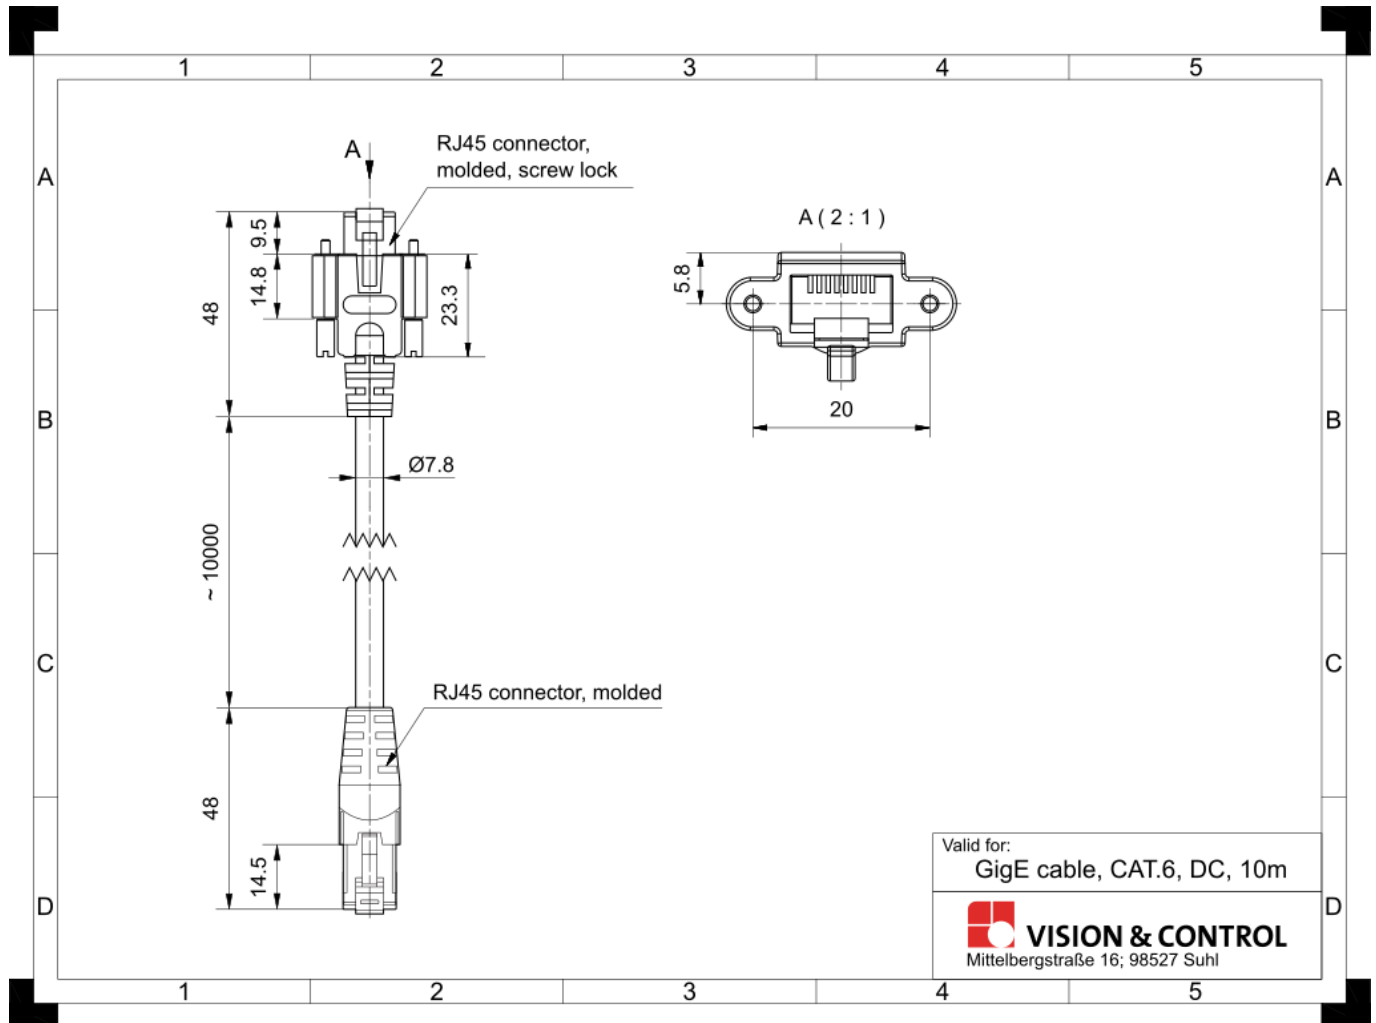

Dimensional drawing in mm